

# 厦门宏端电子科技有限公司

## 承认规格书

### SPECIFICATION FOR APPROVAL

客户名称 CUSTOMER		日期 DATE	2015-03-19
客户产品名称 CUSTOMER PART NAME		供应商产品名称 VENDOR PART NAME	TF PUSH PUSH (B款)
客户规格型号 SPECIFICATION		供应商规格型号 SPECIFICATION	LOXI - JK - 005 - 001
客户产品编码 CUSTOMER PART NO.		供应商产品编码 VENDOR PART NO.	005ZAQFSFB002-R

制作 (PRE.): Jeff

审核 (CHKD BY):

批准 (APPROVAL BY): Nick.Liu

客户承认结果 (APPROVAL RESULT):

合格(OK) 不合格(NG) 其他(OTHER):

说明 (REMARK):

日期:        年        月        日

承办 (APPD):


审核 (CHKD BY):

批准 (APPROVAL BY):

--

RoHS

REV.	ECR NO.	DESCRIPTION

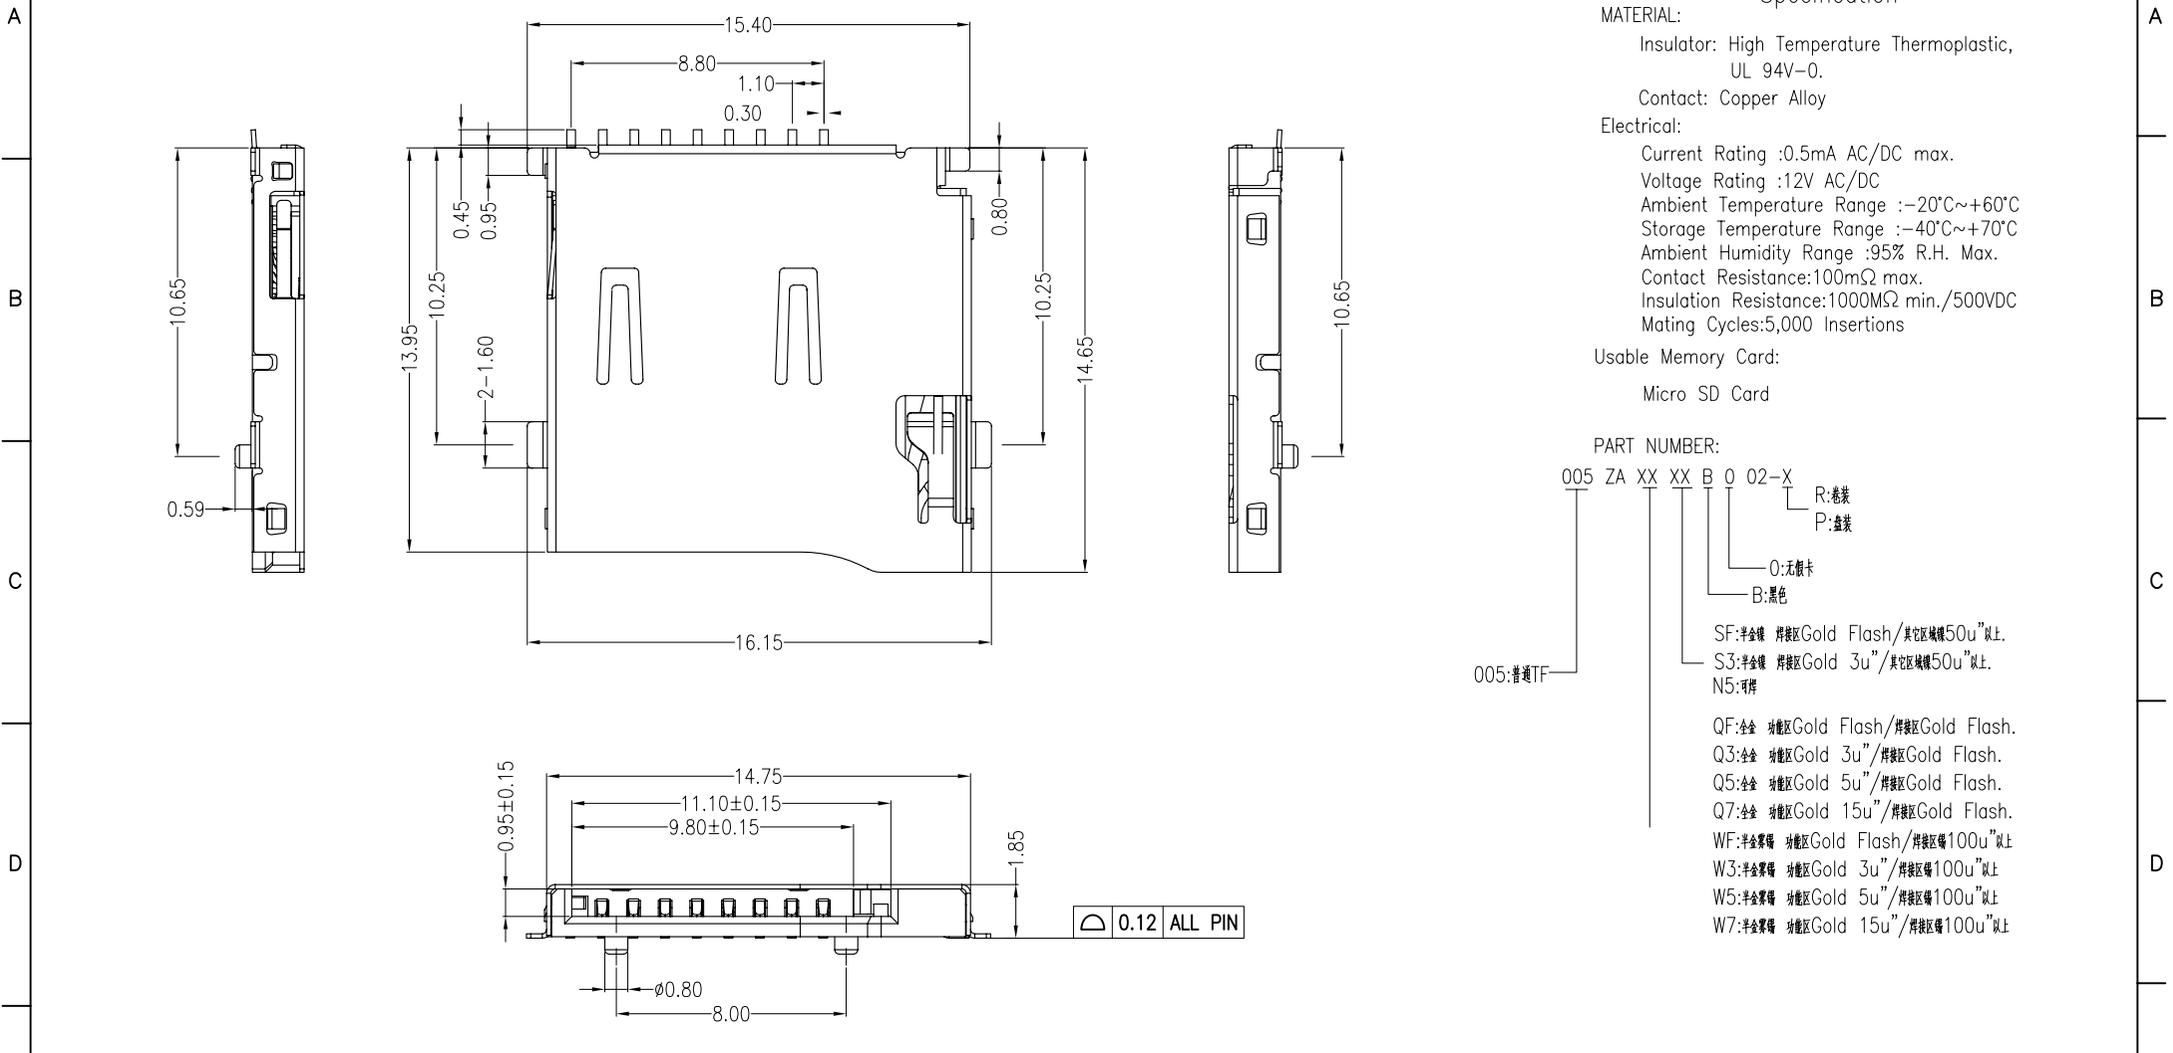

Specification

MATERIAL:  
 Insulator: High Temperature Thermoplastic, UL 94V-0.  
 Contact: Copper Alloy

Electrical:  
 Current Rating :0.5mA AC/DC max.  
 Voltage Rating :12V AC/DC  
 Ambient Temperature Range :-20°C~+60°C  
 Storage Temperature Range :-40°C~+70°C  
 Ambient Humidity Range :95% R.H. Max.  
 Contact Resistance:100mΩ max.  
 Insulation Resistance:1000MΩ min./500VDC  
 Mating Cycles:5,000 Insertions

Usable Memory Card:  
 Micro SD Card


PART NUMBER:

005 ZA XX XX B 0 02-X

005:普通TF  
 ZA:卷装  
 XX:盘装  
 B:黑色  
 0:无锁卡  
 02:普通TF

SF:半金镍 焊接区Gold Flash/其它区域镍50u"以上.  
 S3:半金镍 焊接区Gold 3u"/其它区域镍50u"以上.  
 N5:镍焊

QF:全金 焊接区Gold Flash/焊接区Gold Flash.  
 Q3:全金 焊接区Gold 3u"/焊接区Gold Flash.  
 Q5:全金 焊接区Gold 5u"/焊接区Gold Flash.  
 Q7:全金 焊接区Gold 15u"/焊接区Gold Flash.  
 WF:半金镍焊 焊接区Gold Flash/焊接区镍100u"以上  
 W3:半金镍焊 焊接区Gold 3u"/焊接区镍100u"以上  
 W5:半金镍焊 焊接区Gold 5u"/焊接区镍100u"以上  
 W7:半金镍焊 焊接区Gold 15u"/焊接区镍100u"以上

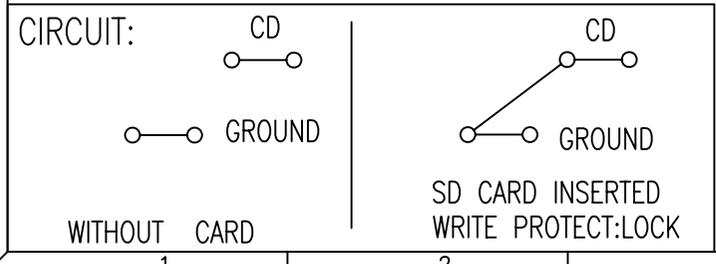

**厦门宏端电子科技有限公司**

DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE	TITLE NAME:T-FLASH 卡座PUSH 系列	DRAW:	DATE:
DIMENSION TOLERANCE	PART NO. : 005ZAXXXXB002-X	CHEC:	DATE:
X.X: ± 0.35 X.XX: ± 0.30 X.XXX: ± 0.15 ANGULAR: ± 1°	DRAWG NO. : JK-005-001	APPD:	DATE:
		TYPE: Y	SCALE: REV: PAGE:




RoHS

PIN ASSIGNMENT:

REV.	ECR NO.	DESCRIPTION
B	RN-131202	新增双压片印字规格

RECOMMEND PCB LAYOUT:

(Unit:mm .X ± 0.15 .XX ±0.05 .XXX ± 0.02)

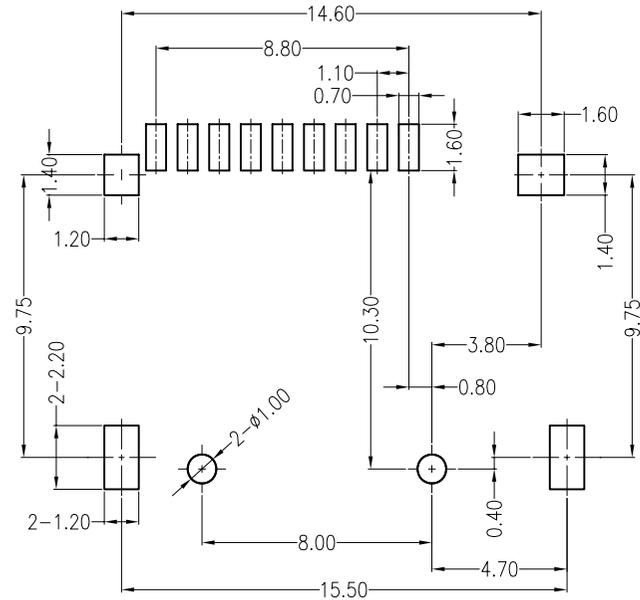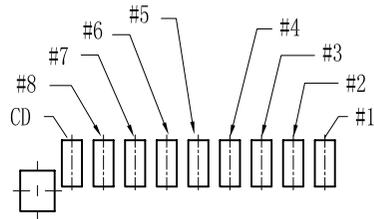

PIN NO.	PIN ASSIGNMENT
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1


厦门宏端电子科技有限公司

DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE X.X: ± 0.35 X.XX: ± 0.30 X.XXX: ± 0.15 ANGULAR: ± 1°	TITLE NAME: T-FLASH 卡座PUSH 系列	DRAW: Nick	DATE: 2013-12-03
	PART NO. : 005ZAXXXXB002-X	CHE: Jeff	DATE: 2013-12-04
	DRAWG NO. : JK-005-001	APPD: Tony	DATE: 2013-12-05
		TYPE: Y	SCALE: 1:1
			PAGE: 2/4


RoHS

T-FLASH Card Insert Drawing:


REV.	ECR NO.	DESCRIPTION
B	RN-131202	新增双压片印字规格

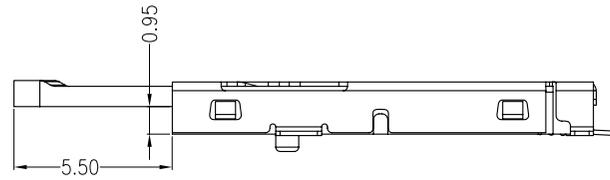


Micro SD Card -Un Lock



Micro SD Card -Lock



Micro SD Card -Push

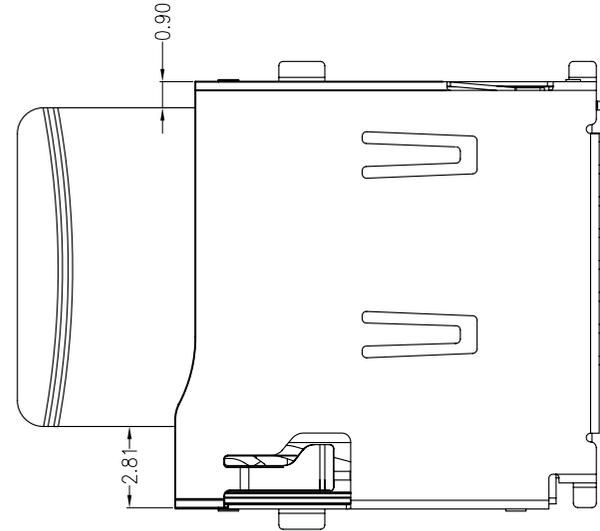


厦门宏端电子科技有限公司


DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE X.X: ± 0.35 X.XX: ± 0.30 X.XXX: ± 0.15 ANGULAR: ± 1°	TITLE NAME: T-FLASH 卡座PUSH 系列	DRAW: Nick	DATE: 2013-12-03
	PART NO. : 005ZAXXXXB002-X	CHEd: Jeff	DATE: 2013-12-04
	DRAWG NO. : JK-005-001	APPD: Tony	DATE: 2013-12-05
		TYPE: Y	SCALE: 1:1
		REV: B	PAGE: 3/4

RoHS


REV.	ECR NO.	DESCRIPTION
B	RN-131202	新增双压片印字规格

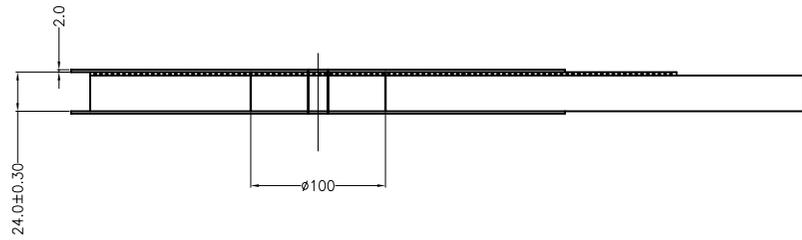

PULL OUT DIRECTION

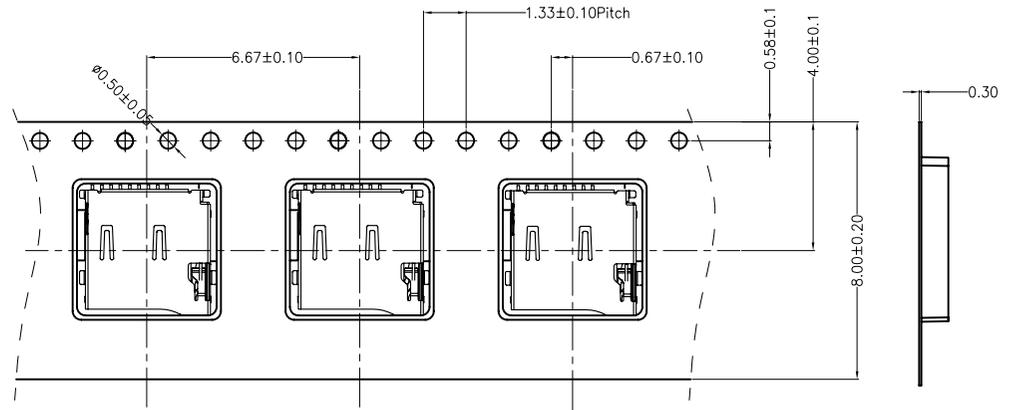

PULL OUT DIRECTION

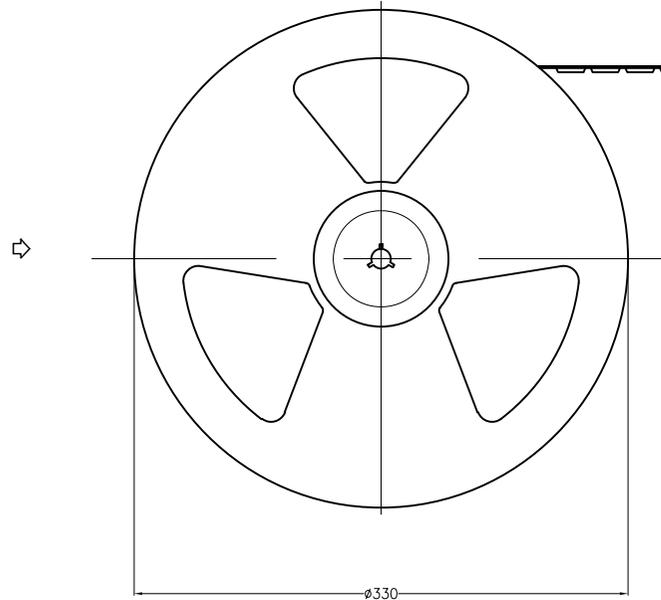

Note:

- 1.(PUT PRODUCT INTO THE TAPE REEL,AND AS SAME DIRECTION)
- 2.(THE DIRECTION REFERE TO DRAWING)
- 3.(QUANTITY OF PER TAPE REEL:1000 PCS)
- 4.(QUANTITY OF PER CARTON:5 TAPE REEL)
- 5.(QUANTITY OF PER CARTON:5000 PCS)
- 6.(THE UNFILLING-CARTON MUST BE FILLED WITH ASSUAGEMENT)
- 7.(THE CARTON FULLY FILLED WITH PRODUCTS,THE MAX. ACCUMULATING QUANTITY IS 5 CARTONS)

### 厦门宏端电子科技有限公司

DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE X.X: ± 0.35 X.XX: ± 0.30 X.XXX: ± 0.15 ANGULAR: ± 1°	TITLE NAME: T-FLASH 卡座PUSH 系列	DRAW: Nick	DATE: 2013-12-03
	PART NO. : 005ZAXXXXB002-X	CHEd: Jeff	DATE: 2013-12-04
	DRAWG NO. : JK-005-001	APPD: Tony	DATE: 2013-12-05
		TYPE: Y	SCALE: 1:1
		REV: B	PAGE: 4/4