




REVISIONS








REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	ECN-P-202101003		更换内部图框发行	2021.01.05	曾 斌
A2	ECN-P-202101003	(A2) x1	改善试纸插拔顺畅, 框口尺寸加大	2023.04.12	李 斌

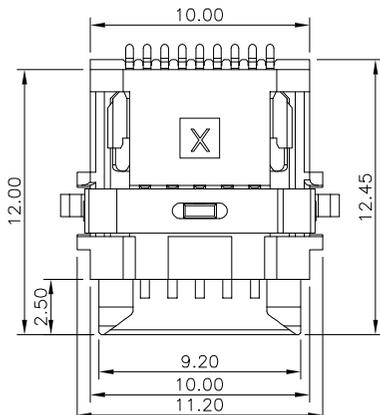

技术要求:
 1. 参照产品规范GWS-068, 电气及机械特性要求如下:
 1.1 额定电流: 0.3A;
 1.2 接触阻抗: 50mΩ以下;
 1.3 绝缘阻抗: 500MΩ以上;
 1.4 耐电压: 500V AC以上;
 1.5 耐插拔: 10,000次以上;
 1.6 插入力: 0.20~2.0N;
 1.7 拔出力: 0.20~2.0N;
 2. 产品符合RoHS、HF无卤环保标准要求.

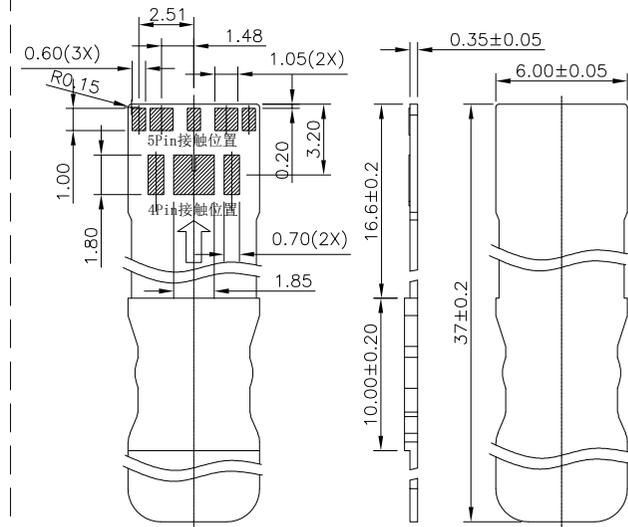

9PIN TEST CARD DIMENSION TOL:±0.05

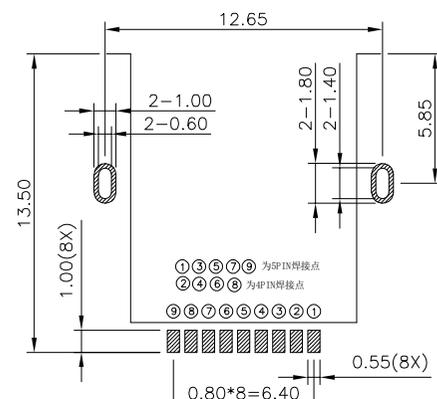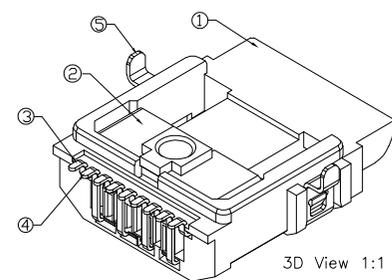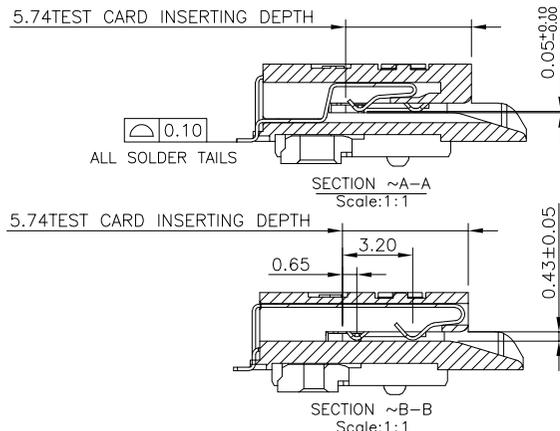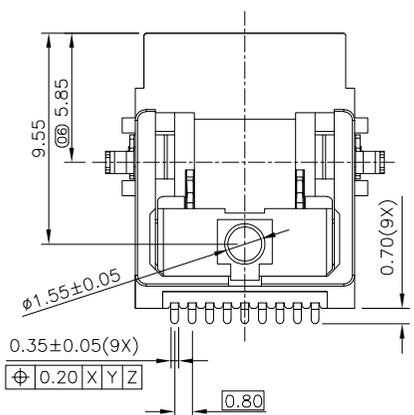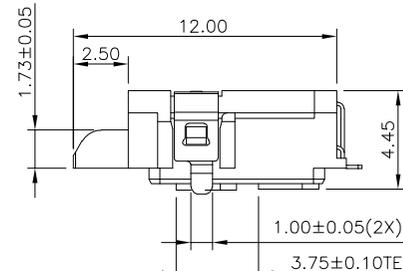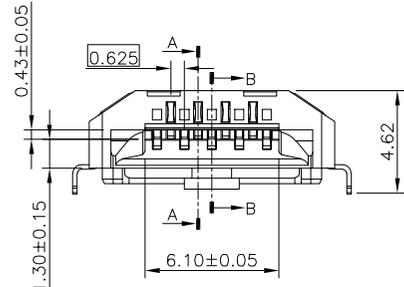

Recommended PCB Layout(TOP-VIEW)
 Recommended Metal Mask Thickness=0.10mm
 Tolerance:±0.05

This document is the property of GETWELL development corporation.

宏端电子(东莞)有限公司

DESIGN: 李 斌	DATE: 2023.04.12	TITLE: 血糖仪插座-9P 客户图
CHECKED:	DATE:	
APPROVED:	DATE:	
PART NO.: SK-0009S00-111-1A2H	REV.: A2	SCALE: 1:1
DRAWING NO.: C-SK0009S00-01	SIZE: A4	SHEET: 1/1

Unless Otherwise specified, Tolerance:
 X. ±0.30
 X.x ±0.20
 X.xx ±0.15
 X.xxx ±0.10
 ANGLES ±3°

A

A

D

D

ITEM	PART NAME	PART NUMBER	Q'TY	MATERIAL	DESCRIPTION
05	CONTACT C	TL-SK0009TC-800	1 PCS	C5191R-H, T=0.20mm	SOLDER: MATTE 100~150" Sn.
04	CONTACT B	TL-SK0009SB-800	5 PCS	C5191R-H, T=0.15mm	CONTACT: G/F Au/SOLDER: MATTE 100~150" Sn.
03	CONTACT A	TL-SK0009SA-800	4 PCS	C5191R-H, T=0.15mm	CONTACT: G/F Au/SOLDER: MATTE 100~150" Sn.
02	PLAETIC HANDLE	KN-SK0009-1A0H	1 PCS	PA10T 640 BK003	BLACK, UL94V-HB
01	HOUSING	HS-SK0009-1A0H	1 PCS	PA10T 640 BK003	BLACK, UL94V-HB