



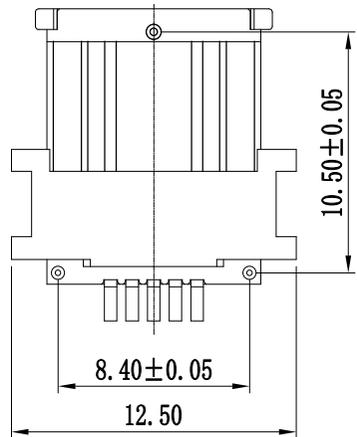


SECTION A — A

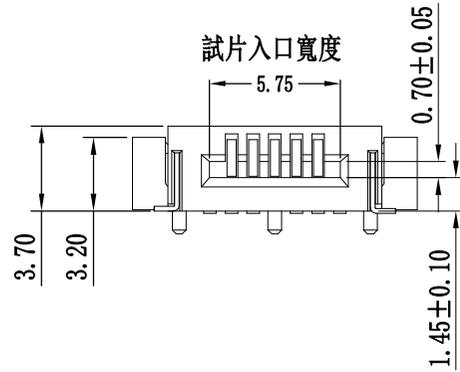

試片接觸端建議厚度 $0.35^{+0.05}_{-0.10}$

- 1.材料:
- 1.1外壳: LCP 颜色 黑色, UL94-V0;
 - 1.2端子: 磷青铜
 - 1.3表面处理: 镍底镀锡
- 2.电气性能
- 2.1额定电流: 1AMP
 - 2.2耐电压: 500V AC MIN
 - 2.3绝缘电阻: 500 MΩ MIN
 - 2.4接触电阻: 30 mΩ MAX
 - 2.5插拔力: 300g±100g
 - 2.6端子插拔力寿命: 15000次
- 3.环境
- 3.1温度范围: -25度至+85度

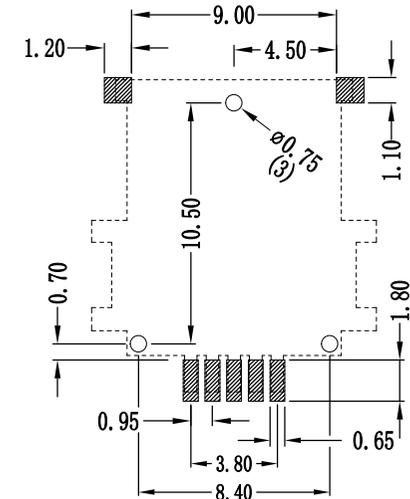

PCB LAYOUT

一般公差 GENERAL TOLERANCES		
LINEAR	ANGULAR	
.XXX ±0.15	.XX° ±1°	
.XX ±0.25	.X° ±2°	
.X ±0.35	X.° ±3°	
X	±—	

宏端电子(东莞)有限公司

产品名称: JS-05001
(MOUD NAME)

核准: (APPD)	Robert	REV:XA	SCALE:4:1
审核: (CHKD)	Robert	SIZE:A4	UNITS:
绘图: (DRAW)	Junior	SHEET:	

料號: DDWC-JS05-M003
(PART. NO)

圖名: 試紙座
(TITLE)

圖號:
(DWG. NO)

修訂 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	修改者 DRAW BY	日期 DATE
				2023-06-19

臺灣專利編號 M 409820

中國專利編號 ZL 2011 2 0088944. 0