


- 1.材料:
- 1.1外壳: LCP 颜色 黑色, UL94-V0;
 - 1.2端子: 磷青铜
 - 1.3表面处理: 镍底镀锡
- 2.电气性能
- 2.1额定电流: 1AMP
 - 2.2耐电压: 500V AC MIN
 - 2.3绝缘电阻: 500 MΩ MIN
 - 2.4接触电阻: 30 mΩ MAX
 - 2.5插拔力: 150g±50g
 - 2.6端子插拔力寿命: 10000次
- 3.环境
- 3.1温度范围: -25度至+85度

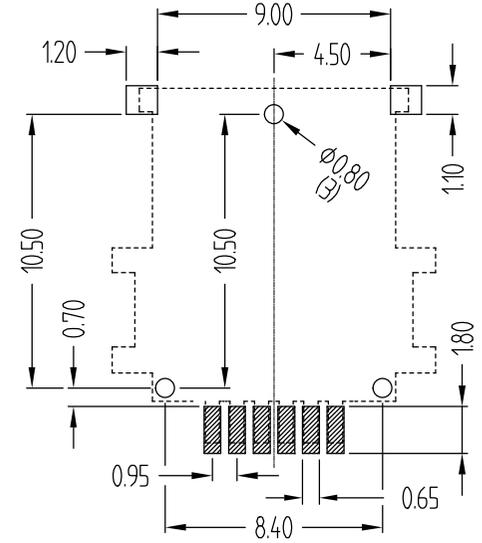

PCB LAYOUT

試片接觸端建議厚度 0.35 ^{+0.05}/_{-0.07}

一般公差 GENERAL TOLERANCES		宏端电子(东莞)有限公司	
LINEAR	ANGULAR	产品名称: JS-06002 (MOD NAME)	
XXX ±0.15	XX° ±1°	料號: DDWC-JS06-M002 (PART NO)	
XX ±0.25	X° ±2°	圖名: 血液測試用連接器 (TITLE)	
X ±0.35	X° ±3°	圖號: (DWG NO)	
X ±---			
核准: (APPD) Robert	REV:XA	SCALE:4:1	
審核: (CHKD) Robert	SIZE:A4	UNITS:	
绘图: (DRAW) Junior	SHEET:		
修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	修改者 DRAW BY
		日期:2023-06-07 (DATE)	

臺灣專利編號 M 409820 中國專利編號 ZL 2011 2 0088944. 0